


# TechnoParts

Electronic Systems & Electrotechnical Equipment

## VOLT-METER-100VDC

0 - 99.9 Volt DC

Red Digital Panel Meter

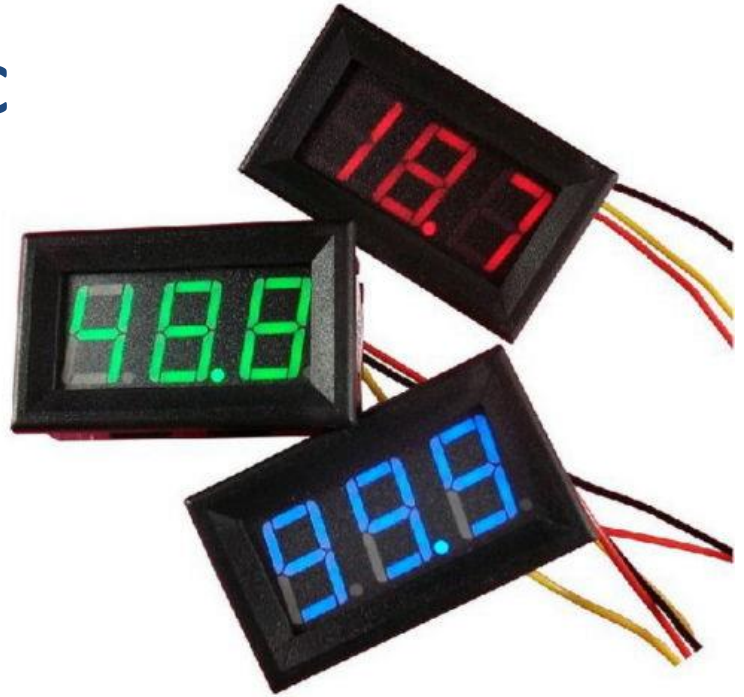

### Description:

3 wire Mini Red LED DC 100V Digital Voltage Panel Meter  
Voltmeter 0-99.9Vdc

### Features & Specifications:

Size: 48 X 29 X 22 mm  
Open pore size: 46 X 27 mm  
Lead wire length: 150 mm  
Net weight: 18 g  
Measuring Range: 0-99.9 Vdc  
Minimum input: 0 Vdc  
Maximum Input: 120 Vdc  
Display: three 0.56" LED digital tube  
Display color: Red  
Refresh speed: About 500ms/each time  
Allowable error: 1% (+/-1)  
Power supply: DC4-30V  
Current consumption: Less than 20 mA, general 5-15 mA  
Working temperature: -10°C ~ 65°C

Yellow line: measuring signal input  
Red line: power supply line  
Black: public cathode

IN-DOOR USE ONLY!



- **Yellow:** Measuring signal input  
- **Red:** Power supply positive  
- **Black:** Common negative